




THE SCROLL VACUUM PUMP

SCR SERIES

DRY SCROLL VACUUM PUMP

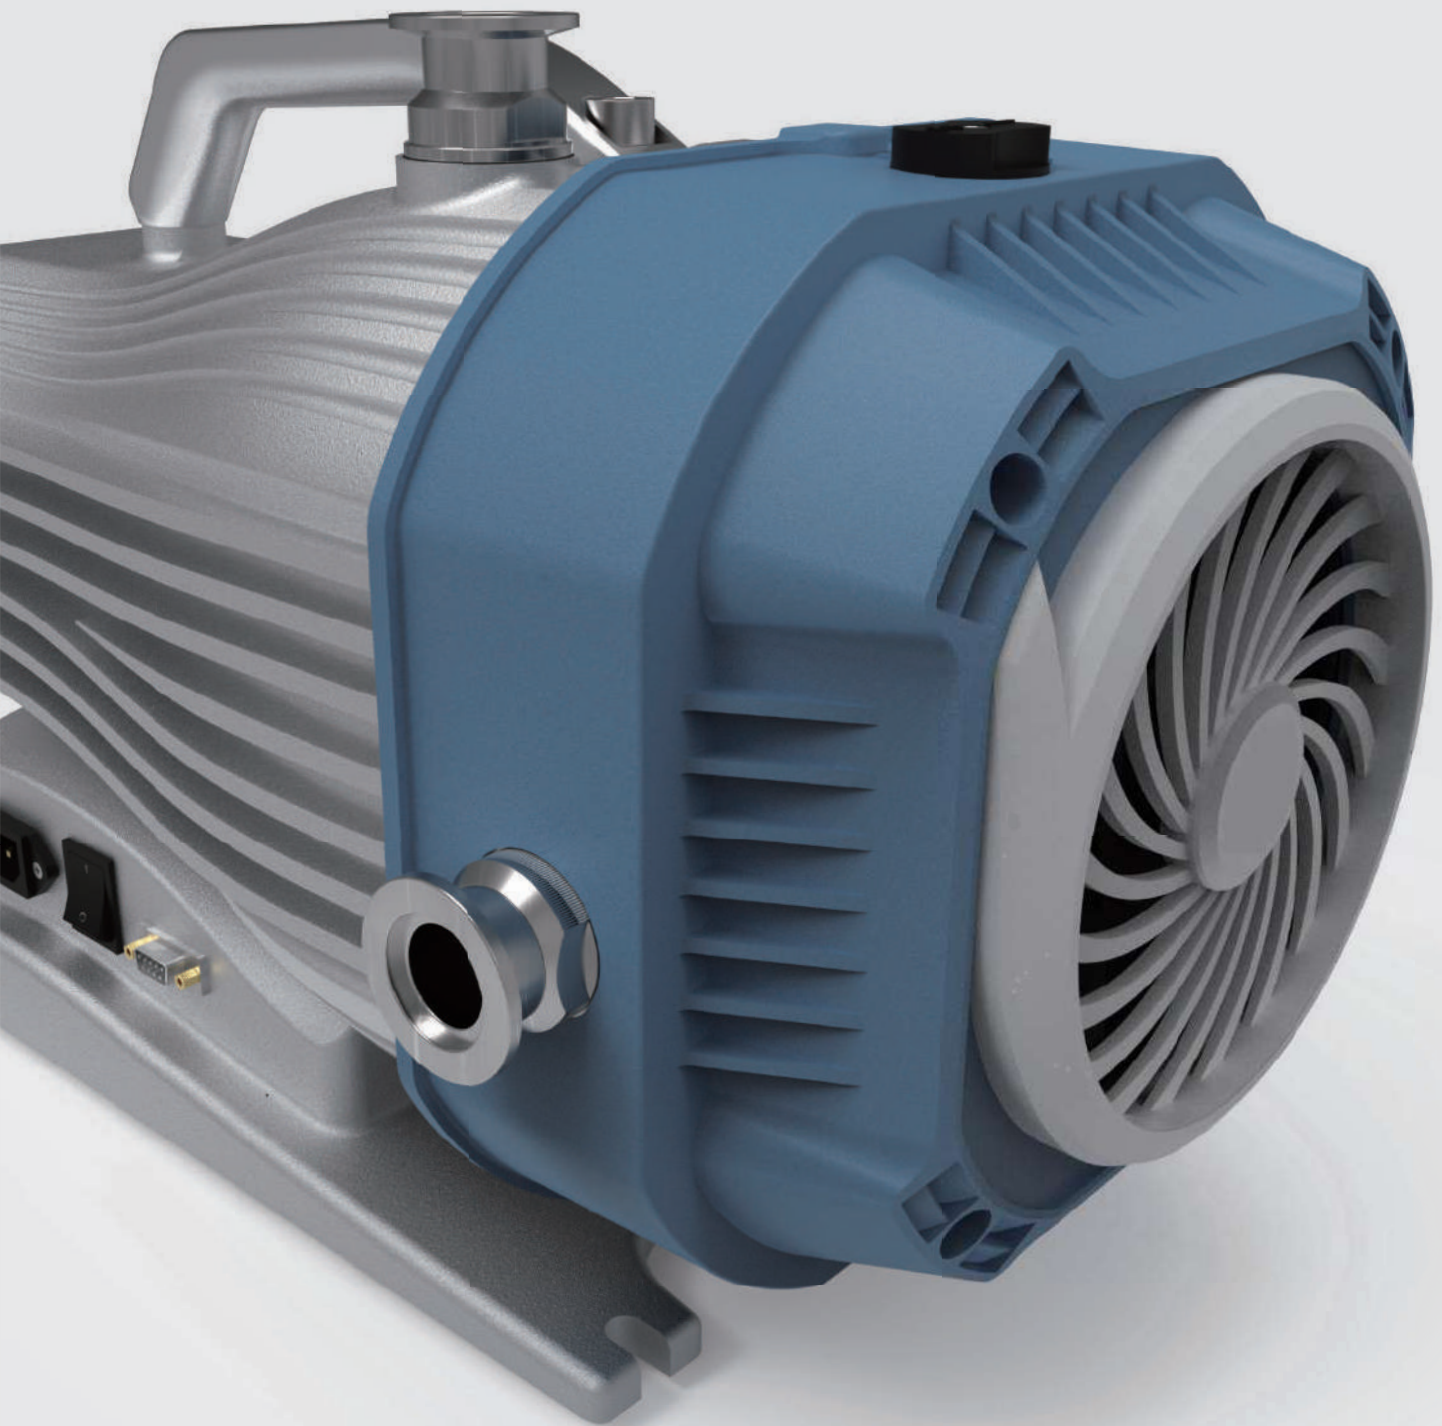


技术参数 TECHNICAL DATA


型号	Unit	SCR-12	SCR-18	SCR-30	SCR-38
理论抽速	m³/h	12	18	30	38
极限真空度	mbar	0.008	0.05	0.008	0.01
功率	W	400	400	750	1100
电压	V	1Ø 100-240	1Ø 100-240	1Ø 100-240/3Ø 200-460	1Ø 100-240/3Ø 200-460
额定转速	rpm	1800	1800	1750	1750
进气法兰		NW25	NW25	KF40	NW40
出口法兰		NW25	NW25	KF25	NW25
水蒸汽处理能力	gh ⁻¹	100	210	60	200
噪声	dB(A)	54	54	63	56
重量	Kg	28	29	44	50
泄漏率	mbar • l/s	<1x10 ⁻⁶	<1x10 ⁻⁶	<1x10 ⁻⁴	<1x10 ⁻⁶
冷却方式		风冷	风冷	风冷	风冷
工作环境温度		10°C to 40°C	10°C to 40°C	5°C to 40°C	10°C to 40°C

尺寸图 DIMENSIONS


SCR-12 / SCR-18

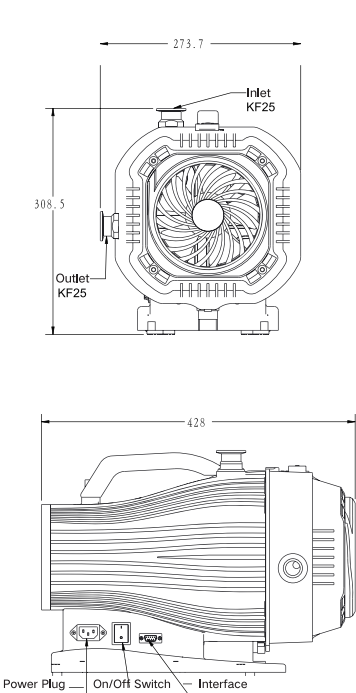

SCR-30

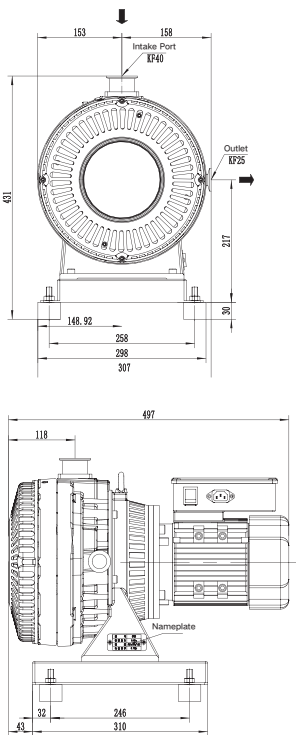

SCR-38

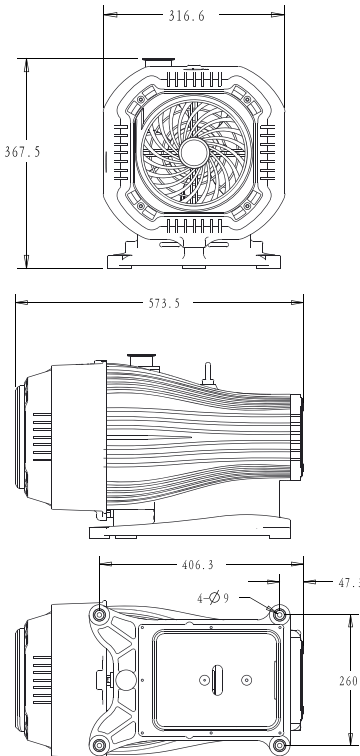

专注真空泵制造与真空系统服务16年

Vacuum Pumps and Vacuum Systems

DG Pransch Air Tech LLC

16, Hongyuan Rd, Nancheng
Dongguan, Guangdong, China

TEL: +86 769 22326463

CELL: +86 18902647040

Email: service@pransch.com

www.pransch.com